




A/123/TS Piezo-Tronic IEPE Accelerometer

1mV/g up to 250mV/g ±10% 4.9gm Std temp 125°C (HT 185°C)

Typical Frequency Response

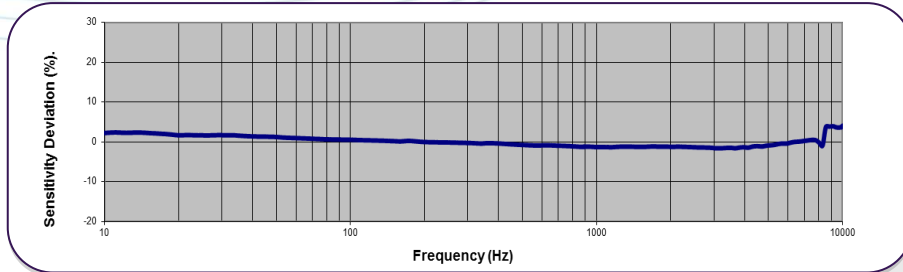



The A/123 range of Piezo-tronic IEPE accelerometers features the Konic shear design sensing element, including a hybrid QVC, packaged to offer a choice of side/ top entry connector, integral stud or flat base (for adhesive mounting). Ideal for applications requiring a low mass compact design for minimal mass loading effect the A/123 offers wide frequency band with a linear response. Available as a high temperature IEPE accelerometer with a max operating temperature of 185°C the A/123 is a highly versatile and robust accelerometer. Applications include, modal testing, general vibration testing, NVH, package testing, shock testing etc.

NOTE: Voltage sensitivities shown are standard. We offer a wide range of sensitivities on request and recommend that applications are evaluated to determine the requisite sensitivity.


Typical Spectral Noise (100mV/g)

1Hz	761µg/√Hz
10Hz	193µg/√Hz
100Hz	37.8µg/√Hz
1kHz	11.2µg/√Hz
10kHz	4.2µg/√Hz

Temperature Response

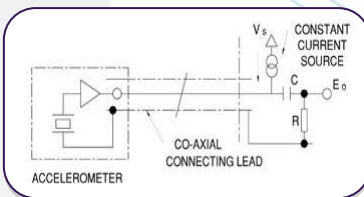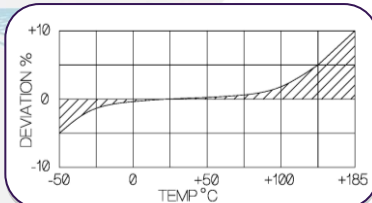

A/123/TS



Options

- Extended low frequency response
- Wideband temperature calibration -50/+125°C.
- A/123/E - Side entry
- A/123/S - Side entry stud
- A/123/TE - Top entry
- A/123/TS - Top entry stud
- A/123/EB - Side entry, Tapped Base
- A/123/TB - Tapped Base

	Metric			Imperial		
Voltage Sensitivity ±10%	0.5mV/(m/s ²)	1.02mV/(m/s ²)	10.2mV/(m/s ²)	5mV/g	10mV/g	100mV/g
Resonant frequency	50 kHz					
Typ. Frequency Response ± 5% ±10%	1Hz – 10kHz 0.7Hz – 11kHz					
Cross Axis error	≤5%					
Temperature Range	-50/+185°C (HT)			-58/+365°F (HT)		
Voltage sensitivity deviation (20°C / 68°F)	-5% @ -50°C +5% @ +125°C +/- 10% @ +185°C (HT)			-5% @ -58°F +5% @ +257°F +/- 10% @ +365°F (HT)		
Supply voltage	15/ 35 standard V DC					
Supply current	2/20 mA					
Bias voltage	9/10 V DC					
Max continuous accn. g sine	9807m/s ²			1000g		
Settling time to 90% final val.	<1 sec					
Base Strain Sensitivity	≤ 5%			≤ 5%		
Saturation limit g	9807m/s ²	4903m/s ²	490.3m/s ²	1000g	500g	50g
Noise level, equiv. mg	3					
Case material	Titanium					
Mounting	M5 x 5mm Int Stud			M5 x 0.2in Int Stud		
Weight	4.9gm			0.17oz		
Case seal	Welded					
Size	9.5(A/F) x 9.4mm			0.37in (A/F) x 0.370in		
Connector	10-32 UNF Microdot					

Please note: For information and reference only. Data should not be used as pass / fail criteria for calibration purposes

DJB Instruments (UK) Ltd

Finchley Avenue,
Mildenhall, Suffolk IP28 7BG

Tel +44 (0)1638 712 288
Email sales@djbinstruments.com
Web www.djbinstruments.com

A UK company with UK-based manufacturing, assembly and calibration in-house.

DJB Iss.5 2018



FM11310