



AMB/5.300 Biaxial MEMS DC Response Accelerometer

±5g range, 300mV/g sensitivity

The AMB range of accelerometers are Biaxial MEMS (micro electro mechanical system) DC response voltage output devices for testing at low frequency vibration measurement from DC (0Hz) and above. They are Biaxial (measuring in 2 directions simultaneously) variable capacitance design and are available with a 2m integral cable fitted with a 7pin connector to suit the DJB DCM-03 MEMS signal conditioning unit or alternatively as bare wires.

Ideally suited to low frequency vibration applications including low level vibration where high sensitivity is required.

Due to their ability to measure DC response they can also be used to measure constant gravity application.

The AMB/5.300 has a range of ±5g and a sensitivity of 300mV/g, we recommend using with DJB's MEMS signal conditioner the DCM-03


Features:

- Operational frequency range DC to 200Hz
- Integral cable with 7 pin connector or pigtails.
- DJB signal conditioner model DCM-03 available as an option
- Differential Capacitance operation
- Compact form and low mass
- Constant gravity measurement


Applications:

- Auto/Aero structural body surveys
- Constant gravity measurements
- General vibration measurement
- Seismic vibration measurement
- Crash testing


AMB/5.300

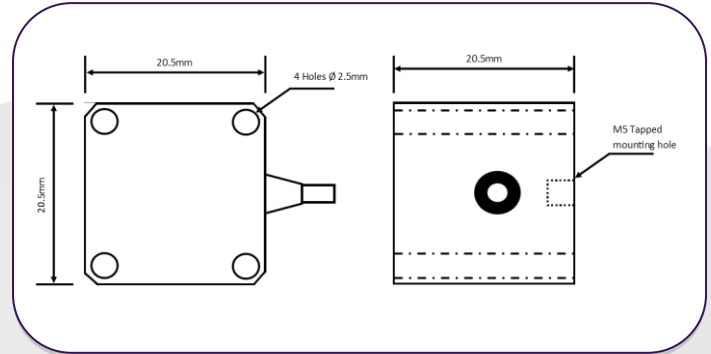

Typical Temperature Response

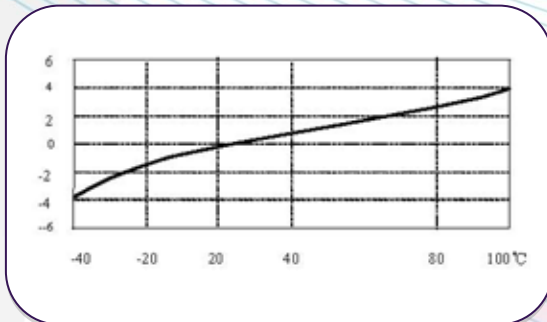

Typical Frequency Response

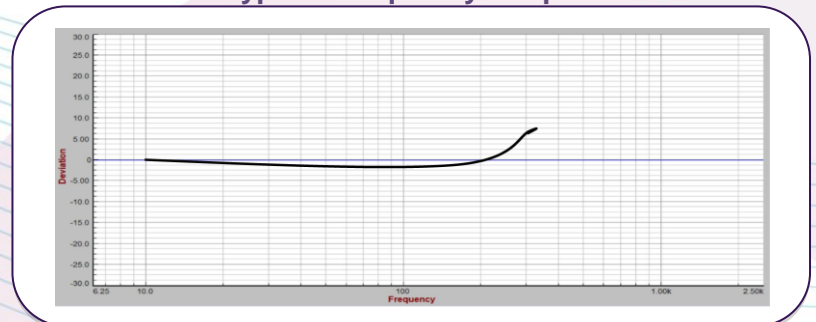

Please note: For information and reference only. Data should not be used as pass / fail criteria for calibration purposes.

DJB Instruments (UK) Ltd

Finchley Avenue,
Mildenhall, Suffolk IP28 7BG

Tel +44 (0)1638 712 288
Email sales@djbinstruments.com
Web www.djbinstruments.com

A UK company with UK-based manufacturing, assembly and calibration in-house.

DJB Iss.3.2019



FM11310



**AMB/5.300 Biaxial MEMS
DC Response Accelerometer**
±5g range, 300mV/g sensitivity

| | Metric | Imperial |
|-----------------------------|--------------------------------------|--------------------------------------|
| Sensitivity (20°C) | 30.59mV/(m/s ²)±10% | 300mV/g±10% |
| Measurement Range | ±49.03m/s ² pk | ±5g pk |
| Transverse sensitivity | ≤5% | |
| Frequency Range (±5%) | DC to 200 Hz | |
| Frequency Range (±10%) | DC to 300Hz | |
| Mounted Resonance Frequency | 5,000 Hz | |
| Temperature Range | -40 to +85°C | -40 to +185°F |
| Temperature Sensitivity | 0.1 mV/°C | |
| Shock limit (No Supply) | 34323m/s ² | ±3,500g |
| Power Supply | +6 to +15 VDC | |
| Operating Current | ≤5mA | |
| Offset Voltage | 2.5±0.1VDC | |
| Noise(100Hz) | < 0.14mVrms | |
| Resolution | 7.5mq (rms) | |
| Output impedance | < 100 Ω | |
| Weight (no cable) | 23grams | 0.81oz |
| Case material | Hard Anodized Aluminum | |
| Case sealing | Epoxy Resin | |
| Mounting | 4 x Ø2.5mm holes or M5 tapped base | 4 x Ø0.1inch holes or M5 tapped base |
| Integral Output Cable | 2m | 6.5ft |
| Cable Exit | Side | |
| Cable connector | 7 pin connector (optional pigtailed) | |
| Size | 20.5 x 20.5 x 20.5mm | 0.81x 0.81 x 0.81 inches |
| IP rating | IP65 | |

Options:

- DCM-03 – 3 channel MEMS signal conditioning unit.
- Pigtail cable terminations

Please note: For information and reference only. Data should not be used as pass / fail criteria for calibration purposes

DJB Instruments (UK) Ltd

Finchley Avenue,
Mildenhall, Suffolk IP28 7BG

Tel +44 (0)1638 712 288
Email sales@djbinstruments.com
Web www.djbinstruments.com

DJB Iss.3.2019



FM11310

A UK company with UK-based manufacturing, assembly and calibration in-house.